



ZTE Blade E Motherboard Replacement

This guide will show you how to remove and replace the motherboard of your phone.

Written By: Lilia Johnson





TOOLS:


- [Spudger](#) (1)
 - [Tweezers](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Motherboard



- Using a spudger, remove the back panel of the phone.

Step 2

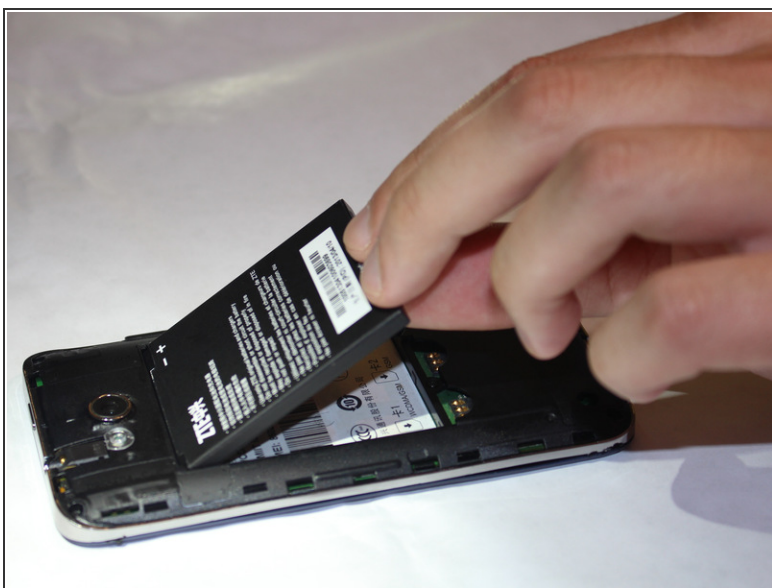

- Remove the battery and SD card from the phone.

Step 3



- Remove the five 4mm Philips #00 screws, circled in red, holding the the back down.

Step 4



- Remove the back piece, exposing the motherboard.

Step 5



- Flip up the three small tan clips holding the ribbons in place.

Step 6



- Gently slide each of the three ribbons out of the motherboard.

Step 7



- Slide the motherboard off of the ribbons detaching it from the front of the phone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-27 01:44:53 AM.